
SLAB TYPE LEGEND



-2" FROM 0'-0" LEVEL

6" HIGH APPLIED

CONCRETE CURB

GENERAL NOTES


1. REFER TO DETAILS FOR SIZE AND PLACEMENT OF CONCRETE CURBS


2. SEE DETAIL 2/2-A9.01 FOR WATERPROOFING OF SLAB PENETRATIONS
2. SEE DETAIL 3/2-A9.01 FOR GUIDE TO LAPPING OF UNDERSLAB WATERPROOFING JOINTS

ALIGNMENT GUIDE

GUIDE TO LOCATE SLAB EDGES

- EXTERIOR EDGES (DIMENSIONS ON FLOOR PLANS)
- INTERIOR EDGES (DIMENSIONS ON FLOOR PLANS) AND AS FOLLOWS: 1. TILE FLOOR RECESSES:
- RECESS EDGES SHALL ALIGN WITH OUTSIDE F.O. TILE BACKER BOARD
- 2. VISIBLE WALL FINISH PASSING SLAB EDGE: OUTER EXTENTS OF BENT PL AND WALL FRAMING SHALL ALIGN

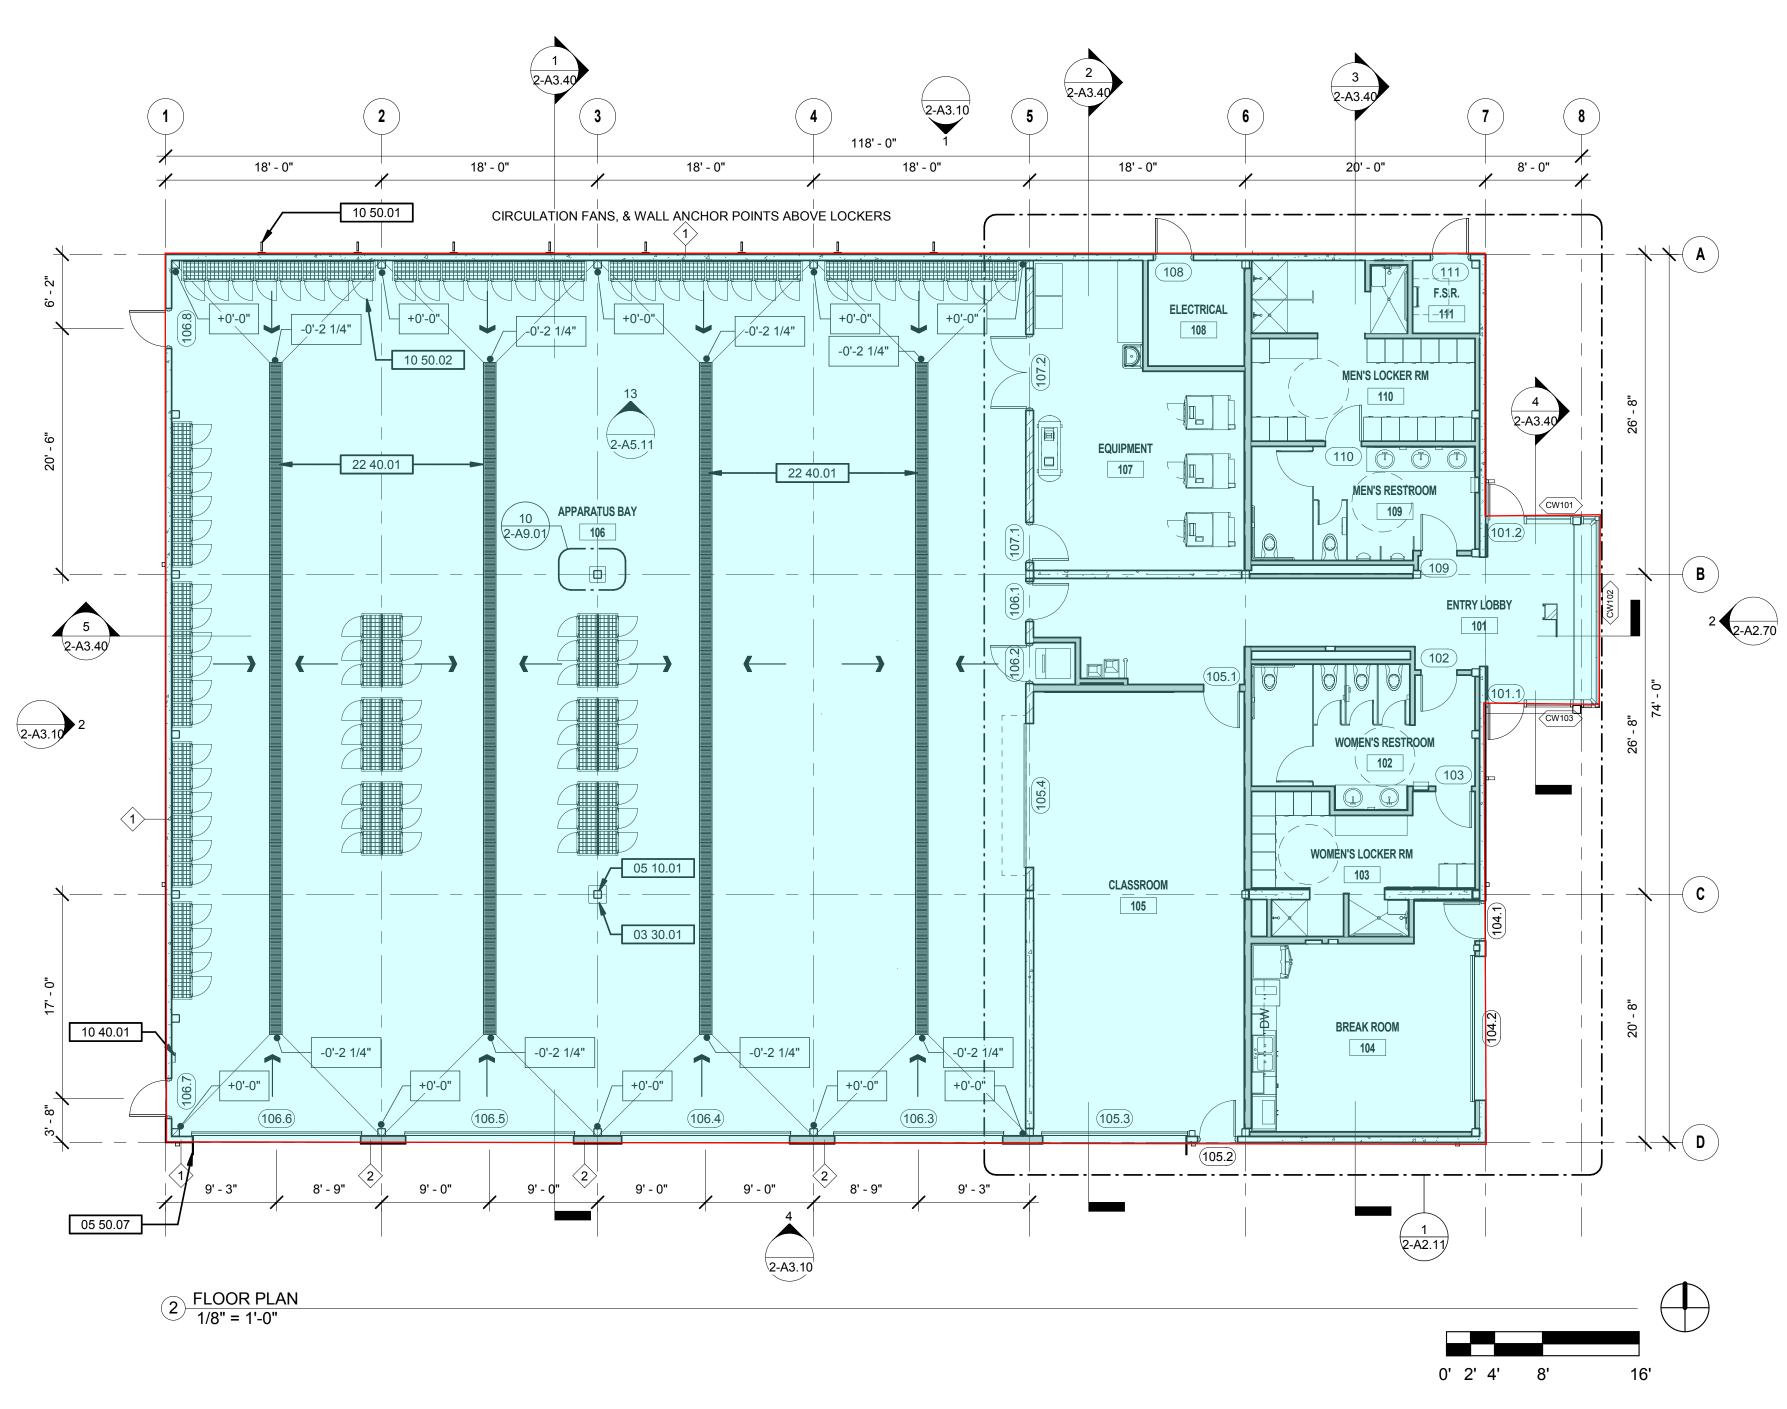

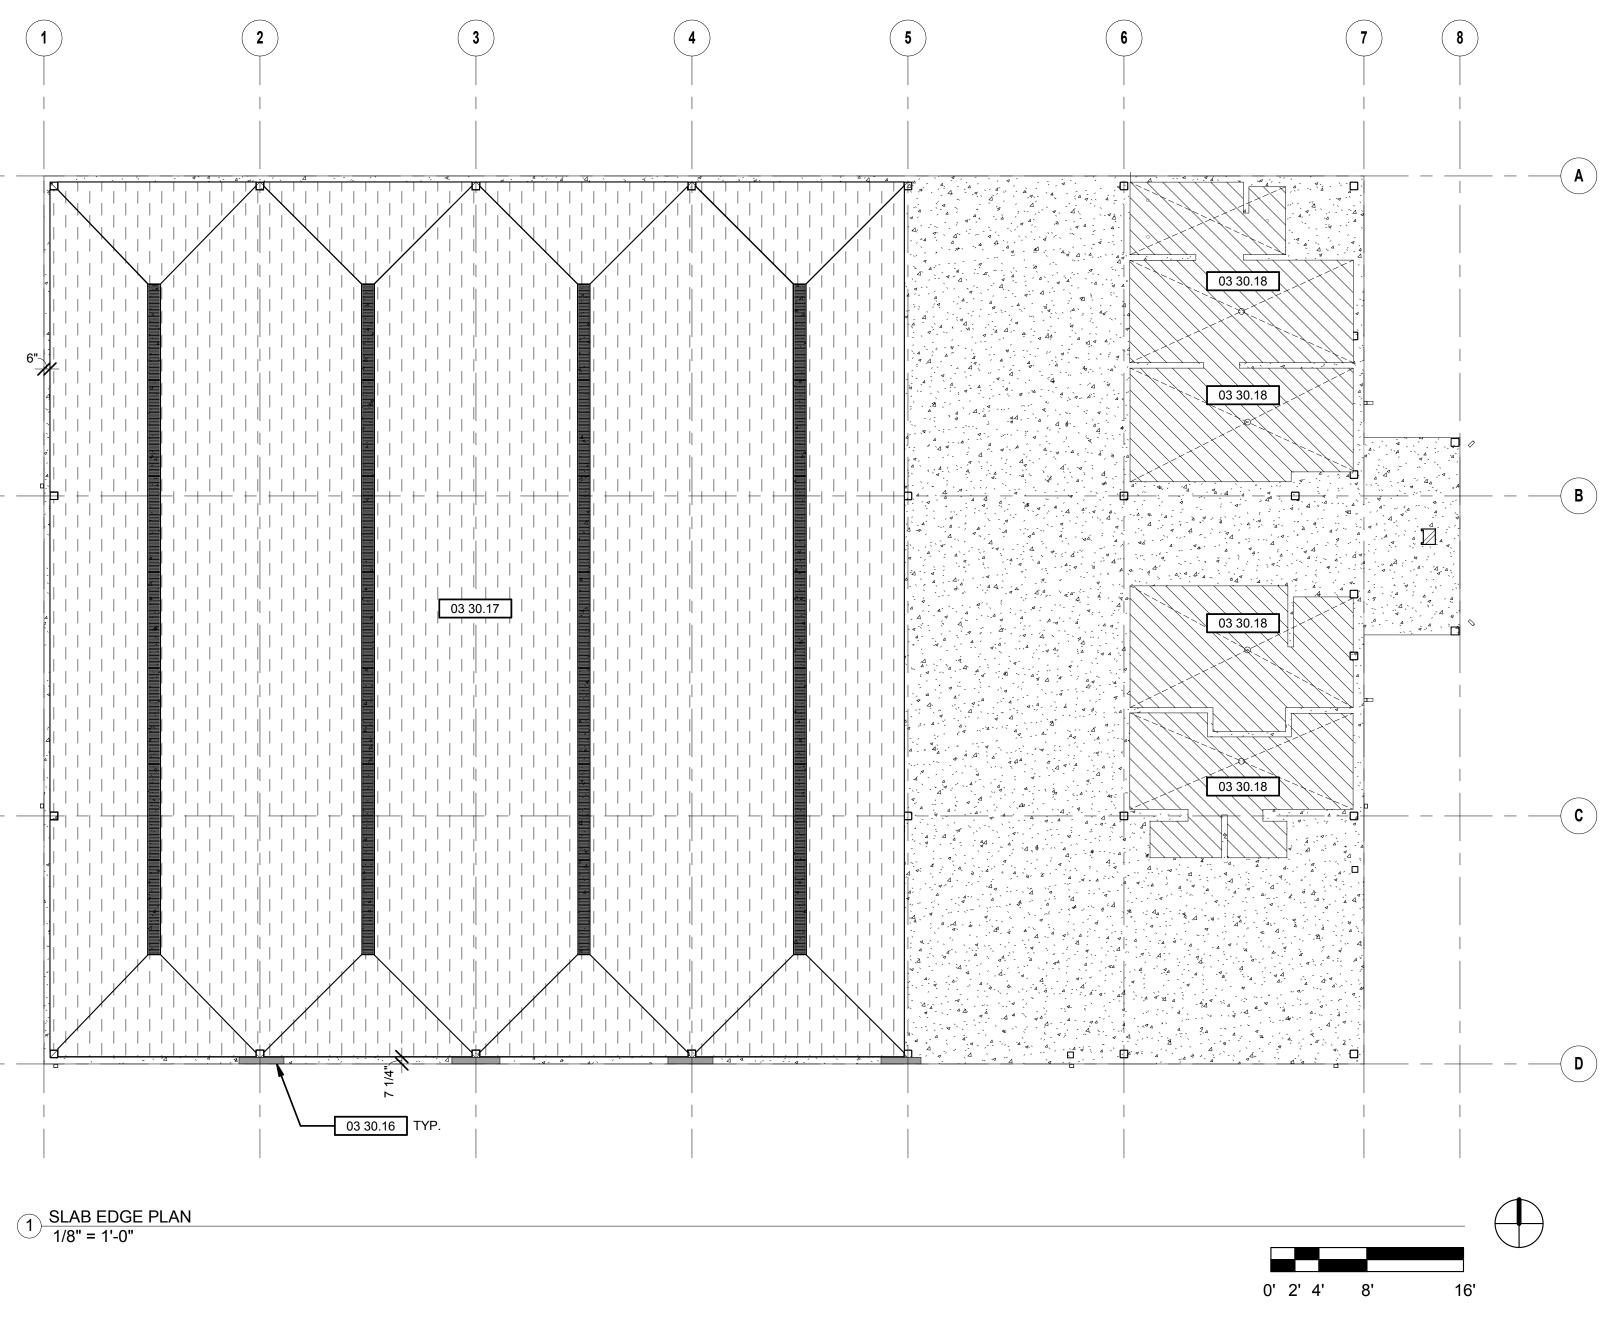

-		
	GENERAL SHEET NOTES	
	1. SEE SH	EET 2-A0.01 FOR ACCESSIBLE MOUNTING HEIGHTS AND CLEARANCES.
	2.	
ŀ		
	WALL LEGEND	
		CONCRETE WALL, S.S.D. FOR THICKNESS & REINFORCING
		CMU WALL TO 8'-0" A.F.F., S.S.D. FOR
		THICKNESS & REINFORCING
		METAL STUD-FRAMED WALL PER
		WALL TYPE (SEE SHEET 2-A8.00)
		ALUMINUM CURTAIN WALL
SHEET KEYNOTE LEGEND		
ŀ	03 30.01	PROTECTIVE CONCRETE CASING @ BASE OF STEEL COLUMN, TYPICAL
┝	03 30.16	U.N.O. 6" HIGH CONCRETE WALL CURB, TYPICAL - WIDTH AS DETAILED
	03 30.17	FLOOR SURFACE SLOPED TO TRENCH DRAINS, SEE DIMENSIONED FLOO PLAN & PLUMBING DRAWINGS
╞	03 30.18	FLOOR SURFACE SLOPED TO FLOOR DRAINS, S.P.D.
F	05 10.01 05 50.07	PAINTED STEEL COLUMN, S.S.D. PAINTED ALUMINUM PLATE "PORTAL" AT HEAD & JAMBS OF APPARATUS
L		BAY DOOR GROUP
ŀ	10 40.01 10 50.01	SURFACE-MOUNTED FIRE EXTINGUISHER CABINET METAL LOCKERS
ŀ	10 50.02	WOOD LOCKERS WITH INTEGRATED BENCH
	22 40.01	PREMANUFACTURED TRENCH DRAIN WITH GALVANIZED STEEL FRAME A DUCTILE IRON GRATE, TYPICAL
L		

